




**STAUNCH**  
MACHINERY  
SINCE 1979

## STAUNCH Two Post Lift ST4.0 2D

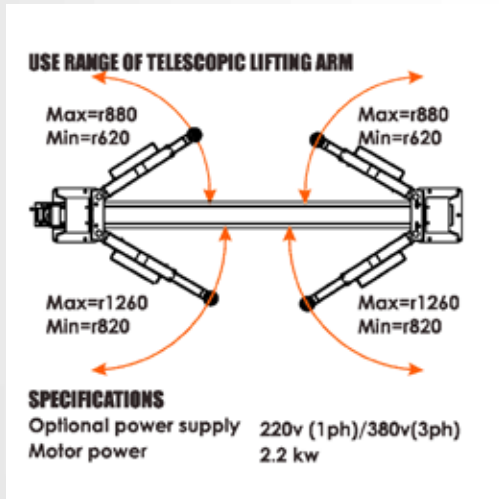

### Description

1. Elegant appearance with hidden cable and pipeline.
2. Adopt 4 safety hooks, balanced fixed, protect the lift front-rear balance and reduce the abrasion and deformation of the machine to the maximum extent, improve the safety performance of the lift
3. External locked safety device, easy to inspect and maintain
4. Equalization of two steel cables force both sliding blocks to move synchronously, effectively prevent the vehicle from tilting
5. Minimum height of the lifting pad is 125 mm, easily lift and suitable for low profile cars and SUV.
6. Equip aluminum motor and car door-opening protection as standard configuration.
7. Reliable oil cylinder, adopts chrome-plating honed cylinder and piston rod, with Italian seals on hydraulic rams, ensure long service life
8. Passed 115% dynamic test and 150% static test

### Technical Data

Model No.	ST 4.0 2D
Feature	Manual release
Lifting Capacity	4000kg (8840 lb)
Lifting Height	1930mm (76")
Machine Height	2824mm (111.2")
Machine Width	2500mm (100")
Power of Motor	2.2kw
Power Supply	20V/380V 1/3 PHASE
Rise Time	55s
Drop Time	25s